
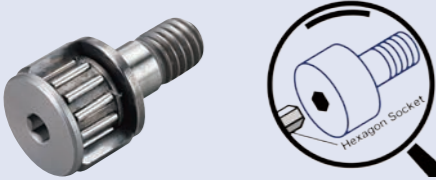
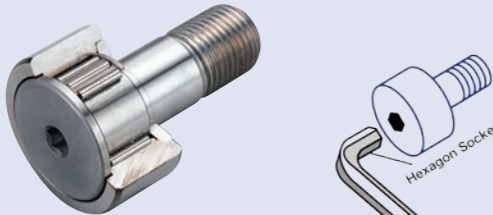
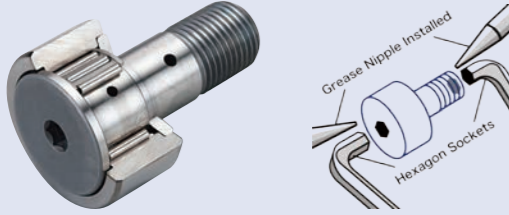





CAM FOLLOWERS

STAINLESS STEEL

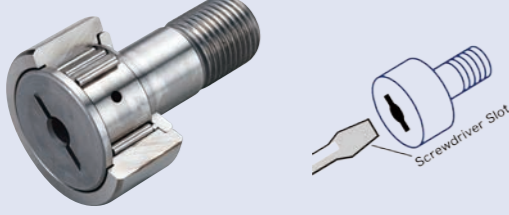

Type and Part Code

Type	Applicable axis diameter	Feature	Part Code
 <p>CFS..MA Miniature type</p>	φ 2.5 ~ φ 6	Stainless type Built-in very thin needle roller. Enables compact design due to very small outer ring diameter in comparison to stud diameter.	<p>V: Full complement None: With cage</p> <p>CFS 6 V M A</p> <p>Type Stud diameter Stainless steel A: With hexagon socket on the stud head</p>
 <p>CF..MA Standard type Hexagon socket on stud head</p>	φ 3 ~ φ 10	Stainless type Hexagon socket on the stud head. Easy mounting with hex-wrench.	<p>V: Full complement UU: Sealed type None: With cage None: Shield type</p> <p>CF 8 V M UU R A</p> <p>Type Stud diameter Stainless steel R: Crowned outer ring A: With hexagon socket on the stud head None: Cylindrical outer ring</p>
 <p>CF..MAB Standard type Hexagon socket on both sides</p>	φ 10 ~ φ 30	Stainless type Both of stud head and thread ends have hexagon holes and integrated grease nipples. Available for mounting with either hexagon sockets and lubrication from both sides.	<p>V: Full complement UU: Sealed type None: With cage None: Shield type</p> <p>CF 16 V M UU R AB</p> <p>Type Stud diameter Stainless steel R: Crowned outer ring AB: With hexagon socket on both sides. None: Cylindrical outer ring (With integrated nipples : Stainless steel)</p>
 <p>CF..M Standard type Screwdriver slot on stud head</p>	φ 5 ~ φ 10	Stainless type General purpose cam follower with screwdriver groove on the stud head.	<p>V: Full complement UU: Sealed type None: With cage None: Shield type</p> <p>CF 8 V M UU R N</p> <p>Type Stud diameter Stainless steel R: Crowned outer ring Option None: Cylindrical outer ring (Dedicated grease nipple : Brass)</p>

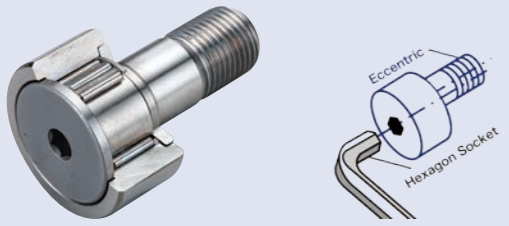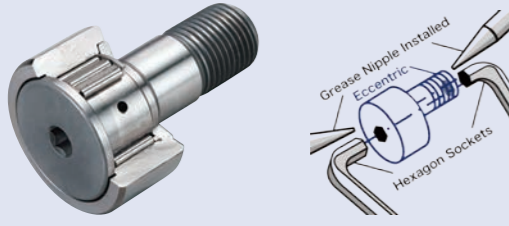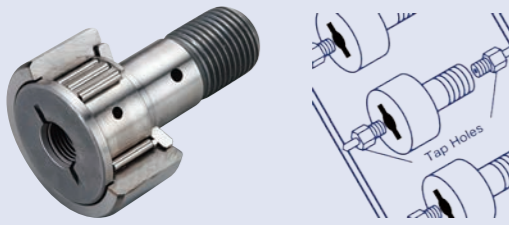Type	Applicable axis diameter	Feature	Part Code
 <p>CFH..MA Eccentric type Hexagon socket on stud head</p>	φ 5 ~ φ 10	Stainless type Available for the same mounting hole as general type. Compact and high accuracy eccentric cam followers with integrated structure enables easy fine positioning adjustment simply by rotating stud due to eccentric stud head shifting 0.2 to 1mm from stud mounting axis.	<p>V: Full complement None: With cage</p> <p>UU: Sealed type None: Shield type</p> <p>CFH 8 V M UU R A</p> <p>Type Stud diameter Stainless steel R: Crowned outer ring None: Cylindrical outer ring A: With hexagon socket on the stud head</p>
 <p>CFH..MAB Eccentric type Hexagon socket on both sides</p>	φ 12 ~ φ 30	Stainless type Eccentric cam follower with integrated grease nipple on both sides. Available for mounting and lubrication with hexagon holes on both sides.	<p>V: Full complement None: With cage</p> <p>UU: Sealed type None: Shield type</p> <p>CFH 16 V M UU R AB</p> <p>Type Stud diameter Stainless steel R: Crowned outer ring None: Cylindrical outer ring AB: With hexagon socket on both sides. (With integrated nipple : Stainless steel)</p>
 <p>CFT..M Tap hole type</p>	φ 6 ~ φ 30	Stainless type Cam follower with tap for piping at stud head and thread of general type. Optimal for location that requires concentrated lubrication piping.	<p>V: Full complement None: With cage</p> <p>UU: Sealed type None: Shield type</p> <p>CFT 16 V M UU R A</p> <p>Type CFHT: Eccentric type Stud diameter Stainless steel R: Crowned outer ring None: Cylindrical outer ring A: With hexagon socket on the stud head (Applicable shaft diameter φ 12 ~ φ 30) None: Screwdriver slot on the stud head</p>