


凸轮从动件


螺柱头部带六角孔



CF..A



CF..VA

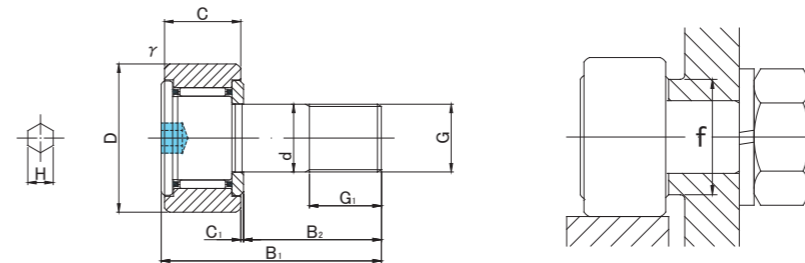

CF..A 类型

预包装润滑脂

螺柱直径 (mm)	类型代号				尺寸 (mm)								基本额定 动负荷	基本额定 静负荷	最大 允许载荷	允许转速 *	轨道载荷能力		最大 拧紧力矩	质量				
	圆筒外圈		球面外圈 R250(≤CF5) R500(CF6~CF10-1)		D	C	d	G	G1	B1	B2	C1					H	rs 最小			f 最小	Cr N	Cor N	N
h7公差	无密封圈	带密封圈	无密封圈	带密封圈																				
3	0 -0.010	CF 3A	CF 3UUA	CF 3RA	CF 3UURA	10	7	3	M3×0.5	5	17	9	0.5	2	0.2	6.8	1 470	1 180	360	47 000	1 370	370	0.4	4.5
		CF 3VA	CF 3VUUA	CF 3VRA	CF 3VUURA												2 800	2 500	360	18 800				
4	0 -0.012	CF 4A	CF 4UUA	CF 4RA	CF 4UURA	12	8	4	M4×0.7	6	20	11	0.5	2.5	0.3	8.6	2 060	2 050	780	37 000	1 760	470	1	7.5
		CF 4VA	CF 4VUUA	CF 4VRA	CF 4VUURA												4 000	4 300	780	14 800				
5	0 -0.012	CF 5A	CF 5UUA	CF 5RA	CF 5UURA	13	9	5	M5×0.8	7.5	23	13	0.5	3	0.3	9.7	3 140	2 770	1 420	29 000	2 250	530	2	10.5
		CF 5VA	CF 5VUUA	CF 5VRA	CF 5VUURA												5 100	5 500	1 420	11 600				
6	0 -0.012	CF 6A	CF 6UUA	CF 6RA	CF 6UURA	16	11	6	M6×1	8	28	16	0.6	3	0.3	11	3 630	3 630	2 110	25 000	3 430	1 080	3	18.5
		CF 6VA	CF 6VUUA	CF 6VRA	CF 6VUURA												6 960	8 530	2 110	12 000				
8	0 -0.015	CF 8A	CF 8UUA	CF 8RA	CF 8UURA	19	11	8	M8×1.25	10	32	20	0.6	4	0.3	13	4 310	4 710	4 710	20 000	4 020	1 370	8	28.5
		CF 8VA	CF 8VUUA	CF 8VRA	CF 8VUURA												8 130	11 170	4 710	9 000				
10	0 -0.015	CF10A	CF10UUA	CF10RA	CF10UURA	22	12	10	M10×1.25	12	36	23	0.6	5	0.3	15	5 390	6 860	6 860	17 000	4 700	1 670	15	45
		CF10VA	CF10VUUA	CF10VRA	CF10VUURA												9 510	14 500	7 450	7 500				
10	0 -0.015	CF10-1A	CF10-1UUA	CF10-1RA	CF10-1UURA	26	12	10	M10×1.25	12	36	23	0.6	5	0.3	15	5 390	6 860	6 860	17 000	5 490	2 060	15	60
		CF10-1VA	CF10-1VUUA	CF10-1VRA	CF10-1VUURA												9 510	14 500	7 450	7 500				

* 无密封圈，适合润滑脂润滑。如果是油润滑，最大允许值可到该数值的 130%。
若为密封型，数值为该数值的 70%。

外圈公差 (μm)

类型	圆筒外圈	球面外圈
CF3,CF4,CF5,CF6	0/-8	0/-50
CF8,CF10,CF10-1	0/-9	0/-50

附件

类型	螺母 已预装
CF3/CF4/CF5/CF6/CF8/CF10/CF10-1	螺母 已预装