


**滚子从动件**  
**不锈钢**  
不可分离型  
带内圈

SUS/INOX SUS/INOX

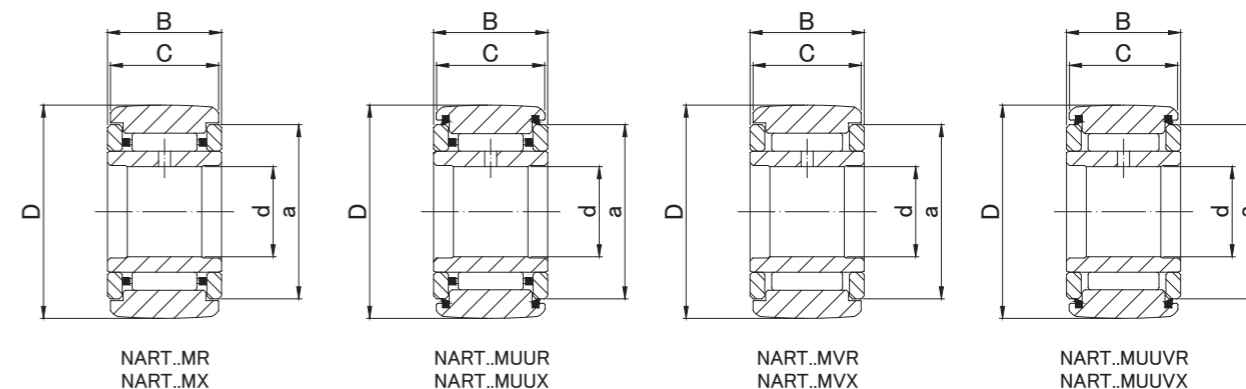

**NART.. M 类型**

预包装润滑脂

轴直径 (mm)	类型代号				尺寸 (mm)					基本额定动负荷 Cr N	基本额定静负荷 Cor N	轨道载荷能力		允许转速 * rpm	质量 g (大约)
	球面外圈 R500(≤NART17R) R1000(NART20R≤)		圆筒外圈		d	D	B	C	a			球面外圈 N	圆筒外圈 N		
	无密封圈	带密封圈	无密封圈	带密封圈											
5	NART 5MR	NART 5MUUR	NART 5MX	NART 5MUUX	5 <sup>0</sup> -0.008	16	12	11	12	3 330 6 210	3 420 7 670	1 080 1 080	3 430 3 430	25 000 8 500	14.5 15.1
	NART 5MVR	NART 5MUUVR	NART 5MVX	NART 5MUUVX											
6	NART 6MR	NART 6MUUR	NART 6MX	NART 6MUUX	6 <sup>0</sup> -0.008	19	12	11	14	3 860 7 020	4 320 9 470	1 370 1 370	4 020 4 020	20 000 7 000	20.5 21.5
	NART 6MVR	NART 6MUUVR	NART 6MVX	NART 6MUUVX											
8	NART 8MR	NART 8MUUR	NART 8MX	NART 8MUUX	8 <sup>0</sup> -0.008	24	15	14	17.5	6 070 10 850	6 710 14 350	1 860 1 860	5 950 5 950	17 000 5 500	41.5 42.5
	NART 8MVR	NART 8MUUVR	NART 8MVX	NART 8MUUVX											
10	NART10MR	NART10MUUR	NART10MX	NART10MUUX	10 <sup>0</sup> -0.008	30	15	14	23.5	7 910 14 350	7 630 16 650	2 450 2 450	7 060 7 060	15 000 5 000	64.5 66.5
	NART10MVR	NART10MUUVR	NART10MVX	NART10MUUVX											
12	NART12MR	NART12MUUR	NART12MX	NART12MUUX	12 <sup>0</sup> -0.008	32	15	14	25.5	8 370 15 450	8 460 18 860	2 740 2 740	7 450 7 450	13 000 4 500	71 73
	NART12MVR	NART12MUUVR	NART12MVX	NART12MUUVX											
15	NART15MR	NART15MUUR	NART15MX	NART15MUUX	15 <sup>0</sup> -0.008	35	19	18	29	13 240 23 090	16 190 33 480	3 140 3 140	11 200 11 200	10 000 3 500	102 106
	NART15MVR	NART15MUUVR	NART15MVX	NART15MUUVX											
17	NART17MR	NART17MUUR	NART17MX	NART17MUUX	17 <sup>0</sup> -0.008	40	21	20	32.5	17 110 29 440	20 700 42 500	3 720 3 720	14 400 14 400	9 500 3 000	149 155
	NART17MVR	NART17MUUVR	NART17MVX	NART17MUUVX											
20	NART20MR	NART20MUUR	NART20MX	NART20MUUX	20 <sup>0</sup> -0.010	47	25	24	38	22 170 38 360	30 080 61 910	7 150 7 150	21 000 21 000	8 000 2 500	250 255
	NART20MVR	NART20MUUVR	NART20MVX	NART20MUUVX											
25	NART25MR	NART25MUUR	NART25MX	NART25MUUX	25 <sup>0</sup> -0.010	52	25	24	43	23 730 41 860	34 500 72 680	8 230 8 230	23 200 23 200	7 000 2 500	285 295
	NART25MVR	NART25MUUVR	NART25MVX	NART25MUUVX											
30	NART30MR	NART30MUUR	NART30MX	NART30MUUX	30 <sup>0</sup> -0.010	62	29	28	50.5	33 300 55 010	52 340 101 560	10 500 10 500	33 000 33 000	5 500 1 800	470 485
	NART30MVR	NART30MUUVR	NART30MVX	NART30MUUVX											
35	NART35MR	NART35MUUR	NART35MX	NART35MUUX	35 <sup>0</sup> -0.012	72	29	28	53.5	35 140 57 960	57 770 111 780	12 900 12 900	38 000 38 000	5 000 1 700	640 655
	NART35MVR	NART35MUUVR	NART35MVX	NART35MUUVX											
40	NART40MR	NART40MUUR	NART40MX	NART40MUUX	40 <sup>0</sup> -0.012	80	32	30	61.5	42 500 70 100	77 920 151 060	14 900 14 900	44 400 44 000	4 000 1 400	845 865
	NART40MVR	NART40MUUVR	NART40MVX	NART40MUUVX											
45	NART45MR	NART45MUUR	NART45MX	NART45MUUX	45 <sup>0</sup> -0.012	85	32	30	66.5	45 350 73 780	87 580 166 610	16 100 16 100	47 000 47 000	4 000 1 300	915 935
	NART45MVR	NART45MUUVR	NART45MVX	NART45MUUVX											
50	NART50MR	NART50MUUR	NART50MX	NART50MUUX	50 <sup>0</sup> -0.012	90	32	30	76	47 010 77 370	94 110 182 160	17 300 17 300	50 000 50 000	3 500 1 200	980 1 010
	NART50MVR	NART50MUUVR	NART50MVX	NART50MUUVX											

\* 无密封圈，适合润滑脂润滑。如果是油润滑，最大允许值可到达该数值的 130%。  
若为密封型，数值为该数值的 70%。

外圈公差 (外径) (μm)

类型	球面外圈	圆筒外圈
NART5M	0/-50	0/-8
NART6M,NART8M,NART10M	0/-50	0/-9
NART12M,NART15M,NART17M,NART20M	0/-50	0/-11
NART25M,NART30M,NART35M,NART40M	0/-50	0/-13
NART45M,NART50M	0/-50	0/-15