



CAM FOLLOWERS

FULL COMPLEMENT DOUBLE ROW
HEXAGON SOCKET ON BOTH SIDES
GREASE NIPPLE INSTALLED

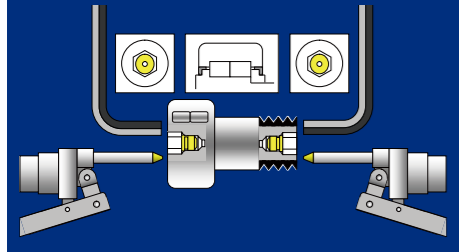

NUCF..AB

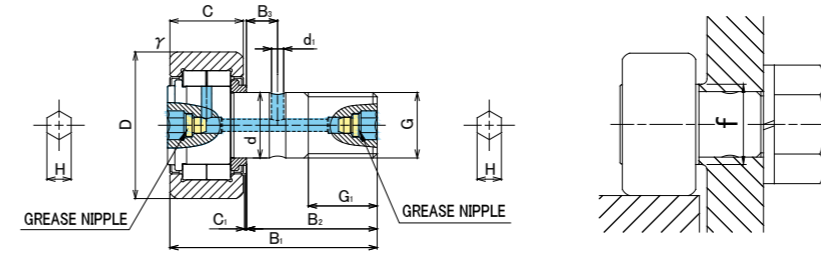

NUCF TYPE

Prepacked Grease

Stud diameter (mm)	Designation	Dimensions (mm)															Basic dynamic load rating	Basic static load rating	Largest permissible load	Limiting speed	Track load capacity		Max tightening torque	Mass
		Cylindrical outer ring	Crowned outer ring R500(NUCF16~NUCF18) R1000(NUCF20≤)	D	C	d	G	G1	B1	B2	B3	C1	D2	H	r _s min	f					Cr N	Cor N		
16	Without seals	With seals	35	18	16	M16x1.5	17	52	32.5	7.8	0.8		3	6	0.6	20	23 400	27 200	11 900	5 200	11 200	3 140	58	167
	NUCF16AB	NUCF16RAB																						
18	Without seals	With seals	40	20	18	M18x1.5	19	58	36.5	8	0.8		3	6	1	22	25 200	30 900	22 200	4 700	14 400	3 720	87	248
	NUCF18AB	NUCF18RAB																						
20	Without seals	With seals	52	24	20	M20x1.5	21	66	40.5	9	0.8		4	8	1	31	43 000	58 100	25 700	3 300	23 200	8 230	120	461
	NUCF20AB	NUCF20RAB																						
20	Without seals	With seals	47	24	20	M20x1.5	21	66	40.5	9	0.8		4	8	1	27	38 900	48 900	25 300	3 800	21 000	7 150	120	390
	NUCF20-1AB	NUCF20-1RAB																						
24	Without seals	With seals	62	28	24	M24x1.5	25	80	49.5	11	1.3		4	8	1	38	57 600	74 300	35 000	2 800	32 000	10 500	220	789
	NUCF24AB	NUCF24RAB																						
24	Without seals	With seals	72	28	24	M24x1.5	25	80	49.5	11	1.3		4	8	1.1	44	63 300	87 500	53 700	2 300	37 200	12 900	220	1 020
	NUCF24-1AB	NUCF24-1RAB																						
30	Without seals	With seals	80	35	30	M30x1.5	32	100	63	15	1		4	8	1.1	47	94 800	135 700	73 700	2 100	52 600	14 900	450	1 630
	NUCF30AB	NUCF30RAB																						
30	Without seals	With seals	90	35	30	M30x1.5	32	100	63	15	1		4	8	1.1	47	94 800	135 700	73 700	2 100	59 300	17 300	450	1 990
	NUCF30-2AB	NUCF30-2RAB																						

OUTER RINGS TOLERANCE (μm)

TYPE	Cylindrical outer ring	Crowned outer ring
NUCF16,NUCF18,NUCF20-1	0/-11	0/-50
NUCF20,NUCF24,NUCF24-1,NUCF30	0/-13	0/-50
NUCF30-2	0/-15	0/-50

ACCESSORIES

TYPE		
All types	Installed	Attached